LED POWER SUPPLY

60W@12V | 60W@24V | Dustproof

SANPU



Features:
- 100-240V AC input
- Single Output
- 85% high efficiency
- 100% full load bur-in test
- Protection: OTP,OLP,OVP,SCP
- CE ROHS Certified
- 3 year warranty


Applications:
- Outdoor LED lighting
- LED office lighting
- LED commercial lighting
- LED decorative lighting

Specifications


Product Code		LLP60-W1V12	LLP60-W1V24
Output	DC Voltage	12V	24V
	Rated Current	5A	2.5A
	Current Range	0~5A	0~2.5A
	Voltage tolerance	±5%	±5%
	Rated Power	60W	60W
	Ripple & Noise	<120mVp-p	<150mVp-p
	Set-up, Rise , Hold-up Time	200ms, 100ms , 30ms	
Input	Input voltage range	100-240 VAC	
	Frequency Range	50~60Hz	
	AC Current	1A / 115VAC; 0.5A / 230VAC	
	Efficiency	85%	88%
	PF	0.6	
Protection	Over Load	**Above 105%-120% of rated power**	
		Shut-down output voltage, auto recovery after fault condition is removed	
	Over Voltage	**Above Max. Voltage (105% of rated voltage)**	
		Shut-down output voltage, auto recovery after fault condition is removed	
	Over Temperature	**Over 105°C detected on main IC control**	
		Shut-down output voltage, auto recovery after fault condition is removed	
Ambiant	Working Temp. & humidity	"-20°C~+60°C, 20%~90%RH	
	Storage temp. & humidity	"-40°C~+85°C, 10%~95%RH	
Tesings	Withstand voltage	I/P-O/P: 1.5KVAC/1min; I/P-F/G: 1.5KVAC/1min;O/P-F/G: 0.5KVAC/1min;	
	Safety	GB4943 ;IEC60950-1; EN60950-1	
	EMC	EN 55032:2015+A11:2020 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN55035:2017+A11:2020	
	LVD	EN60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013	
Others	Demension(L*W*H)	182*32.6*23mm	
	Packing	0.14kg/pcs, 100pcs/15kg/CTN	

Mechanical Structures

■Side View




■Vertical view

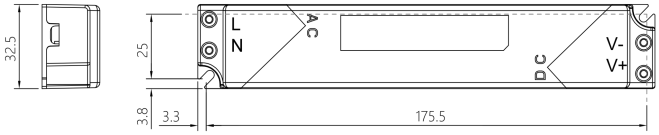


Wiring Diagram


1. Without Dimming

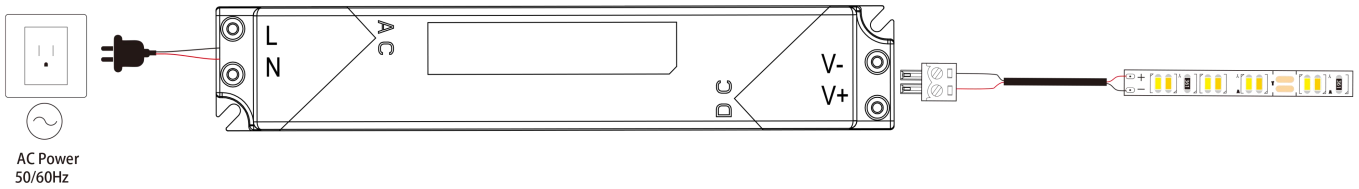


2. With Dimming

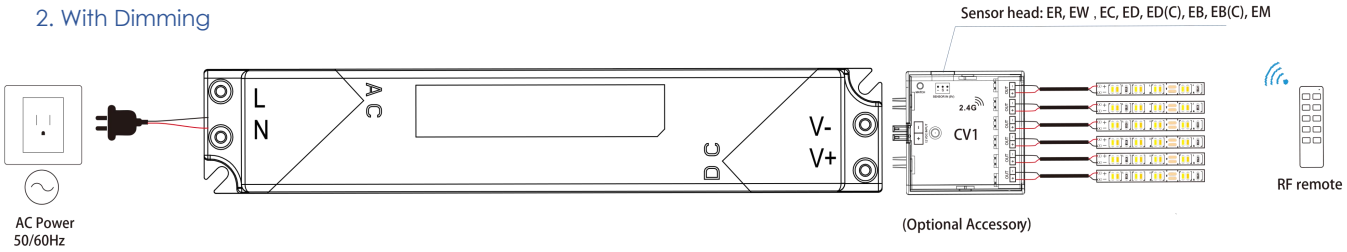

■Drating Curve

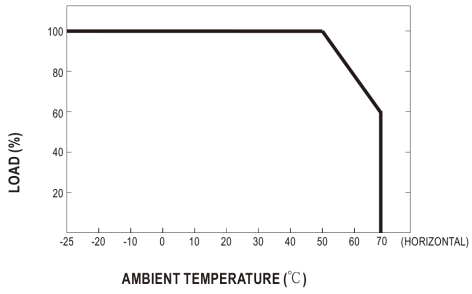

■Static characteristic

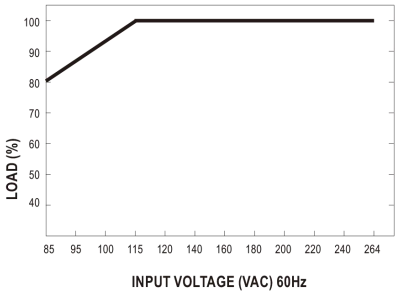

Notes:

1. The above mentioned data were measured at 230VAC input and 25°C.
2. Dis-connect the AC input before checking any mal-phenomenons.
3. Make sure the INPUT&OUPUT were in right situation before connected to power supply.
4. Datesheet for reference only. We suggest you take sampling before mass orders.